



PINNACLE PARTNERS



LEAO TIRE



COMPANY INTRODUCTION



Shandong Linglong Tyre Co., Ltd. is a technical tire manufacturer integrating tire design, development, manufacturing and sales.

Founded in 1975, the company has seven R&D centers, seven manufacturing bases across the world currently and over 17,783 employees, with its products widely used on passenger vehicles, commercial vehicles, and engineering machinery vehicles. It has built diversified brand system for different markets.

In the future, the company will fully implement its global layout, fully improve its core competitiveness, and strive to achieve its annual production and sales volume reaching 160 million units, sales revenue of over RMB 80 billion and production capacity among global top five tire manufacturers by 2030, becoming a technology-oriented enterprise with world-class technology, management and brand influence.

en.linglong.cn

BRAND VALUE

It strengthens the retail network construction, with nearly

200,000

marketing outlets globally, promoting its brand reputation and customer loyalty through reliable product quality and excellent service.

The company's products are exported to 173 countries across the world, covering Europe, Middle East, Americas, Asia Pacific, and Africa, and provides OE service for over 100 manufacturing bases of 60 global well-known automakers.

Linglong's brand value reached

98.137

Billion RMB in 2024.

Linglong has sponsored over

100

sports events and teams worldwide

Abundant sports marketing sponsorship

such as Real Madrid CF and Chelsea FC, to enhance its brand awareness and influence.



GLOBAL LAYOUT

Linglong collects global extraordinary wisdom to demonstrate intelligent Linglong with technological innovation. The company has established R&D institutions in Germany, America, Beijing, Shanghai, Jinan, Yantai and Zhaoyuan, owning national enterprise design center, national recognized testing laboratory and national industrial design center, to form global integrative R&D pattern.



R&D Center in America

R&D Center in Germany

Serbia

Linglong International Europe d.o.o.Zrenjanin

R&D Center

- R&D Center in Zhaoyuan and Yantai
- R&D Center in Beijing
- R&D Center in Shanghai
- R&D Center in jinan

Linglong Tyre Co.,Ltd.

- jilin Linglong Tyre co.,Ltd.
- Shandong Linglong Tyre Co.,Ltd.
- Dezhou Linglong Tyre Co.,Ltd.
- Shaanxi Linglong Tyre Co., Ltd.
- Hubei Linglong Tyre Co.,Ltd.
- Guangxi Linglong Tyre Co.,Ltd.
- Anhui Linglong Tyre Co.,Ltd.

Linglong International Tyre(Thailand)Co.,Ltd

7+5 STRATEGIC GLOBAL POSITIONING

In June 2021, Linglong plans to change its 6+6 global layout into 7+5 global layout to build seven Chinese manufacturing bases as well as five overseas manufacturing bases. At present, the company has five Chinese manufacturing bases in Zhaoyuan, Dezhou, Liuzhou, Jingmen, Changchun and two overseas manufacturing bases in Thailand and Serbia. Meanwhile, Linglong will carry out active inspection of its new factory's location, aiming at completing the full completion of 7+5 global layout, and fully utilizing global resources and expanding its global tire market.

SOCT--STRESS OPTIMIZATION CONTROL TECHNOLOGY

New structure

Four belt structure to optimized grounding pressure distribution.wear and anti-groove crack upgrade

New Compound

Using a new type of nanoscale low hysteresis loss composite material
(Ensure wear and lower rolling resistance)

New cord material

UT ultra-high strength wire and reinforced structure
(to ensure safety and service life)

New profile and pattern

Account rolling resistance,wet grip and noise performance



LEAO TIRE




LONG HAUL



ADL11
RADIAL TRUCK TIRE
Suitable for drive axle of trucks.
P11



ATL11
RADIAL TRUCK TIRE
Suitable for trailer axle of trucks.
P13



LONG HAUL


REGIONAL

ON&OFF ROAD


COACH&URBAN

WINTER

ADL11

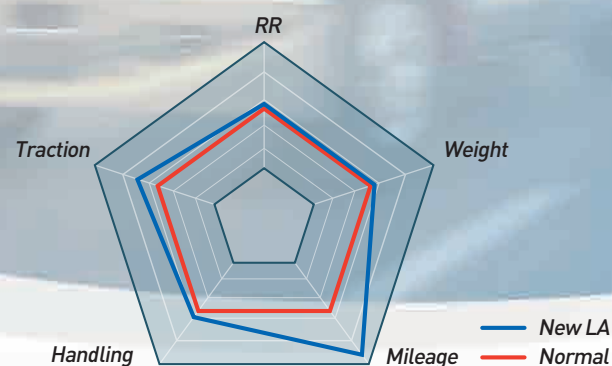

TRACTION WEAR-RESISTANT



DRIVE


Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi)				Overall Diameter in (in)	Section Width in (in)	Tread Depth (32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	40.24	11.54	26
11R22.5	146/143L	16	H	6005	120	6610	120	41.53	11.06	26
11R24.5	149/146L	16	H	6610	120	7160	120	43.50	11.06	26

RADIAL TRUCK TIRE

ORIGIN: THAILAND

SELLING POINTS OF TIRE PRODUCTS

- 1 Closed shoulder promoted uniform wear and improved rolling resistance.
- 2 Z-Zag groove provides good traction performance.
- 3 Aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread.

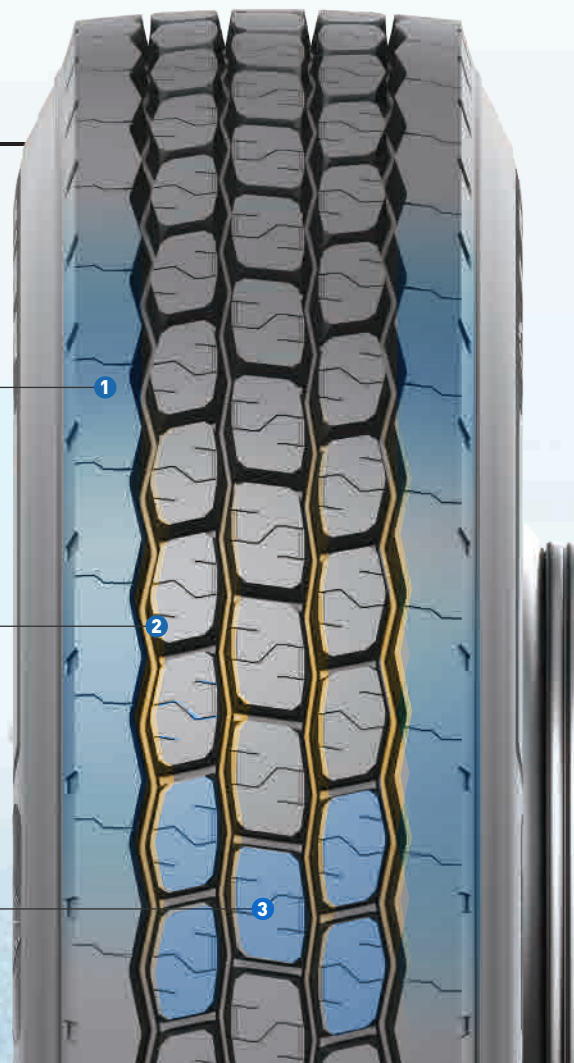

LONG HAUL


REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

ATL11

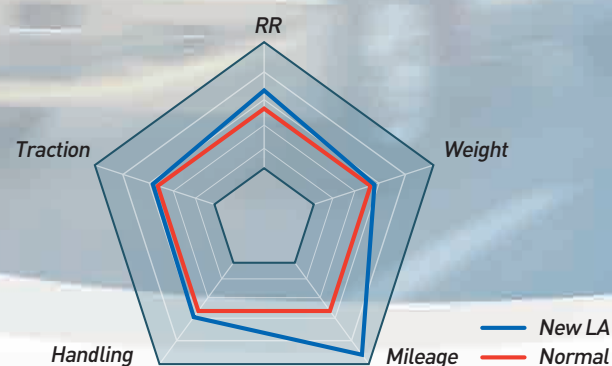


RADIAL TRUCK TIRE

ORIGIN: THAILAND

SELLING POINTS OF TIRE PRODUCTS

- 1 Closed shoulder promoted uniform wear and improved rolling resistance.
- 2 Micro sipes on groove edges resists abnormal or "river wear".
- 3 Decoupling groove helps resist uneven shoulder wear.

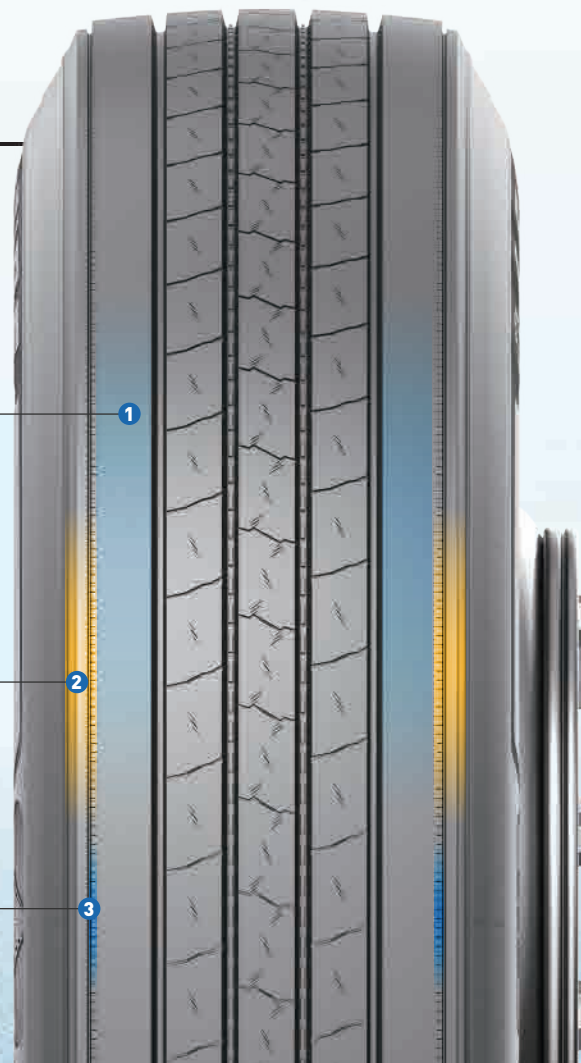

Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi)				Overall Diameter in (in)	Section Width in (in)	Tread Depth (32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.41	11.42	12
11R22.5	146/143L	16	H	6005	120	6610	120	40.94	11.10	12
11R24.5	149/146L	16	H	6610	120	7160	120	42.91	11.10	12

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER





KTD10



Suitable for the drive axle of the trucks running on highway.

- Low rolling resistance reduces fuel consumption.
- Closed shoulder to fight irregular wear.
- New pattern design improves mileage for long-distance transportation.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.93	10.98	30.0	TRA
	11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.93	10.98	30.0	TRA
	11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.94	10.98	30.0	TRA
	11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.94	10.98	30.0	TRA
	285/75R24.5	14	144/141	L	8.25	5675	110	6175	110	41.81	11.14	28.0	TRA
	285/75R24.5	16	147/144	L	8.25	6175	120	6780	120	41.81	11.14	28.0	TRA
	295/75R22.5	14	144/141	L	9.00	5675	110	6175	110	40.39	11.73	28.0	TRA
	295/75R22.5	16	146/143	L	9.00	6005	120	6610	120	40.39	11.73	28.0	TRA



ADE892




Suitable for the drive axle of the trucks running on highway.

- Good braking and grip on wet road.
- Long life, low rolling resistance.
- Optimize the footprint for even wear and long tread life.
- Strong carcass materials.
- Help to promote tire durability and provide tire retreadability.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.93	10.98	27.7	TRA
	11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.93	10.98	27.7	TRA
	11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.94	10.98	27.7	TRA
	11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA
	285/75R24.5	14	144/141	L	8.25	5675	110	6175	110	41.81	11.14	27.7	TRA
	285/75R24.5	16	147/144	L	8.25	6175	120	6780	120	41.81	11.14	27.7	TRA
	295/75R22.5	14	144/141	L	9.00	5675	110	6175	110	40.39	11.73	27.7	TRA
	295/75R22.5	16	146/143	L	9.00	6005	120	6610	120	40.39	11.73	27.7	TRA



LLF16



Suitable for the steer axle of the trucks running on highway.

- Good handling.
- Long life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
	11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
	11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
	11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
	285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
	285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA
	295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
	295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA



LLF16e+



- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
★	11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
★	11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
★	11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
★	11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
★	285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
★	285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA
★	295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
★	295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA

★: SmartWay



LLD37



Suitable for the drive axle of the trucks running on highway.

- Good braking and grip on wet road.
- Long life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.93	10.98	27.7	TRA
	11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.93	10.98	27.7	TRA
	11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.94	10.98	27.7	TRA
	11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA
	285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.81	11.14	27.7	TRA
	285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.81	11.14	27.7	TRA
	295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.39	11.73	27.7	TRA
	295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.39	11.73	27.7	TRA

LLD37e+



Suitable for the drive axle of the trucks running on highway.

- Good braking and grip on wet road.
- Long life.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
★	11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.93	10.98	22.0	TRA
★	11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.93	10.98	22.0	TRA
★	11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.94	10.98	27.7	TRA
★	11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA
★	285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.81	11.14	27.7	TRA
★	285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.81	11.14	27.7	TRA
★	295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.39	11.73	27.7	TRA
★	295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.39	11.73	27.7	TRA

★: SmartWay



ATE821



- Excellent straight running performance.
- Sipes in shoulder offer low noise and good heat dissipation.
- Low fuel consumption.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
★	11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	12.0	TRA
★	11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	12.0	TRA
★	11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	12.0	TRA
★	11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	12.0	TRA
★	285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	12.0	TRA
★	285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	12.0	TRA
★	295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	12.6	TRA
★	295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	12.6	TRA

★: SmartWay



ADL817



- Typical block pattern design makes good towing and grip on wet and dry road.
- Low fuel consumption.
- Wear-resistance compound reduces shifting to prevent uneven wear.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
★	445/50R22.5	18	158	L	14.00	---	---	9370	110	40.08	17.52	25.2	TRA
★	445/50R22.5	20	161	L	14.00	---	---	10200	120	40.08	17.52	25.2	TRA
★	445/50R22.5	18	155	L	14.00	---	---	8540	102	40.08	17.52	25.2	ETRTO
★	445/50R22.5	20	161	L	14.00	---	---	10200	123	40.08	17.52	25.2	ETRTO

★: SmartWay



ATL811



Suitable for the trailer axle of trucks running on highway.

- Low fuel consumption.
- Wear-resistance compound reduces shifting to prevent uneven wear.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
★	445/50R22.5	18	158	L	14.00	---	---	9370	110	40.08	17.52	13.2	TRA
★	445/50R22.5	20	161	L	14.00	---	---	10200	120	40.08	17.52	13.2	TRA
★	445/50R22.5	18	155	L	14.00	---	---	8540	102	40.08	17.52	13.2	ETRTO
★	445/50R22.5	20	161	L	14.00	---	---	10200	123	40.08	17.52	13.2	ETRTO

★: SmartWay



LLD76



Suitable for the drive axle of the trucks running on highway.

- Good braking and grip on wet road.
- Construction optimized for long service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.65	10.98	25.2	TRA
	11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.65	10.98	25.2	TRA
	11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.66	10.98	25.2	TRA
	11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.66	10.98	25.2	TRA



T810e+



- Low fuel consumption.
- Certified by U.S.A SmartWay.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
★	11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	12.6	TRA
★	11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	12.6	TRA
★	11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	13.5	TRA
★	11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	13.5	TRA
★	295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	12.6	TRA
★	295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	12.6	TRA

★: SmartWay



T810



Suitable for the trailer axle of the trucks running on the high-grade road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	13.5	TRA
	11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	13.5	TRA
	11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	13.5	TRA
	11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	13.5	TRA
	255/70R22.5	16	140/137	M	7.50	5070	120	5510	120	36.61	10.04	13.5	TRA
	285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	13.5	TRA
	285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	13.5	TRA
	295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	13.5	TRA
	295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	13.5	TRA



LEAO TIRE



REGIONAL

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER



ADR21

RADIAL TRUCK TIRE
Suitable for drive axle of trucks.

P23



ATR21

RADIAL TRUCK TIRE
Suitable for trailer axle of trucks.

P25



AAR21

RADIAL TRUCK TIRE
Suitable for All position axle of trucks.

P27



AAR22s


RADIAL TRUCK TIRE
For national and regional transportation

P29





ADR21

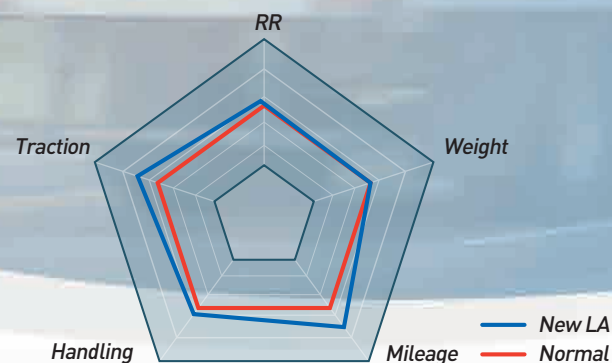

RADIAL TRUCK TIRE


ORIGIN: : THAILAND

SELLING POINTS OF TIRE PRODUCTS

- 1 Open shoulder offers good traction and help with heat dissipation while durable tread compound and narrow groove between shoulder and next rid designed for excellent wear resistance on shoulder.
- 2 Aggressive pattern and lateral grooves provides tire excellent drive and braking performance.
- 3 Two main grooves helps to provide good handling performance.



IMMOBILIZE TRACTIVE FORCE



DRIVE

Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi)				Overall Diameter in (in)	Section Width in (in)	Tread Depth (32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	40.50	11.54	30
11R22.5	146/143L	16	H	6005	120	6610	120	41.78	11.06	30
11R24.5	149/146L	16	H	6610	120	7160	120	43.75	11.06	30

LONG HAUL

REGIONAL


ON&OFF ROAD

COACH&URBAN

WINTER



ATR21

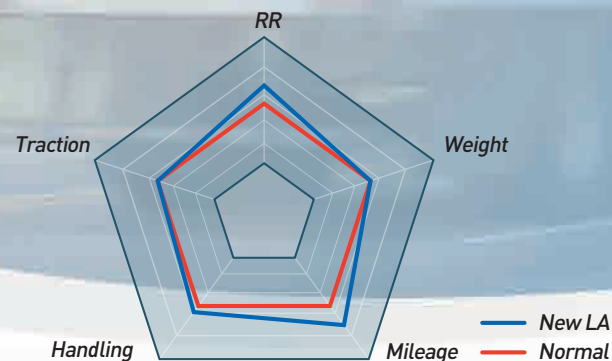


RADIAL TRUCK TIRE

ORIGIN: : THAILAND

SELLING POINTS OF TIRE PRODUCTS

- 1 Wide, continuous shoulder ribs fight turning side forces and resist tearing.
- 2 Micro sipes on groove edges resists abnormal or "river wear".
- 3 Deep tread depth for high-Scrub trailer service.

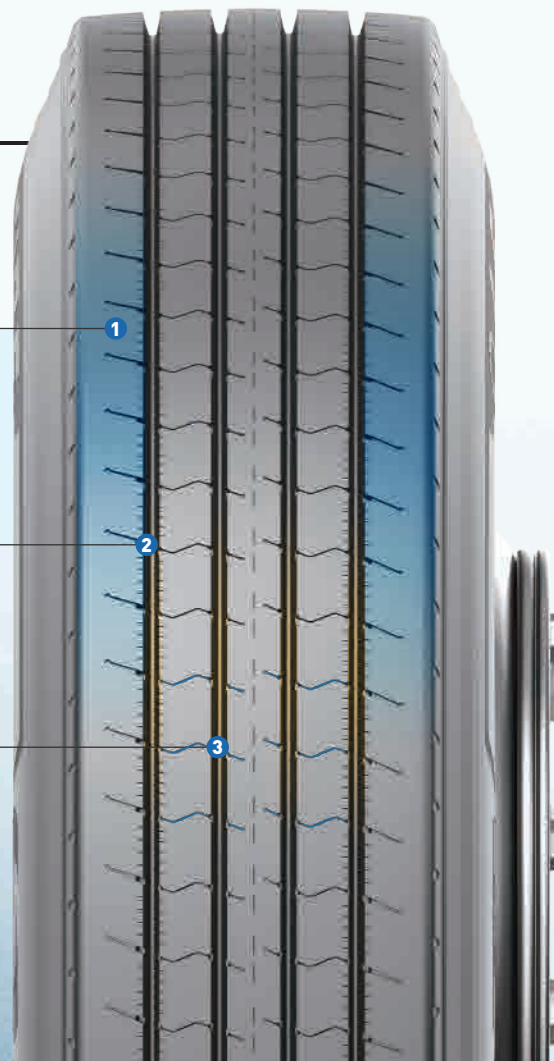

RESISTANCE



WEAR-RESISTANT



TRAILER

Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi)				Overall Diameter in (in)	Section Width in (in)	Tread Depth (32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.72	11.42	17
11R22.5	146/143L	16	H	6005	120	6610	120	41.26	11.10	17
11R24.5	149/146L	16	H	6610	120	7160	120	43.23	11.10	17

LONG HAUL

REGIONAL


ON&OFF ROAD

COACH&URBAN

WINTER



AAR21

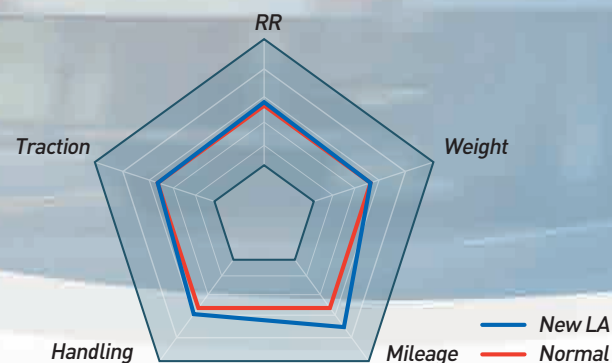

RADIAL TRUCK TIRE

ORIGIN: : THAILAND



TRACTION WEAR-RESISTANT




ALL POSITION

Authentication	Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi)				Overall Diameter in (in)	Section Width in (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
	11R22.5	146/143L	16	H	6005	120	6610	120	41.21	11.06	21
	11R24.5	149/146L	16	H	6610	120	7160	120	43.18	11.06	21
★	215/75R17.5	135/133J	16	H	4540	123	4805	123	30.24	8.35	16
	225/70R19.5	128/126L	14	G	3750	110	3970	110	31.83	8.94	16
★	235/75R17.5	143/141J	18	J	5675	127	6005	127	31.34	9.29	17
	245/70R19.5	135/133L	16	H	4540	120	4805	120	32.95	9.61	17
	255/70R22.5	140/137M	16	H	5070	120	5510	120	36.55	10.16	17
	295/75R22.5	146/143L	16	H	6005	120	6610	120	39.93	11.54	21


★: low profile trailer

SELLING POINTS OF TIRE PRODUCTS

- 1 Tough tread compound and solid shoulder ribs to resist maneuvering scrub.
- 2 A combination of 4 way and straight groove provide outstanding traction and drainage performance.
- 3 Center rib diagonal sipes to promote even wear and grip.

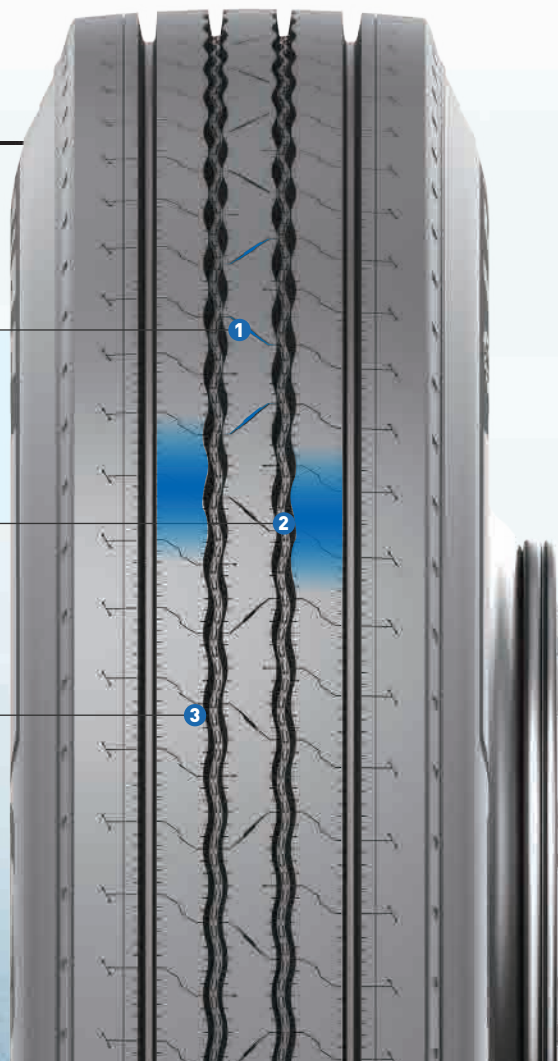

AAR22s

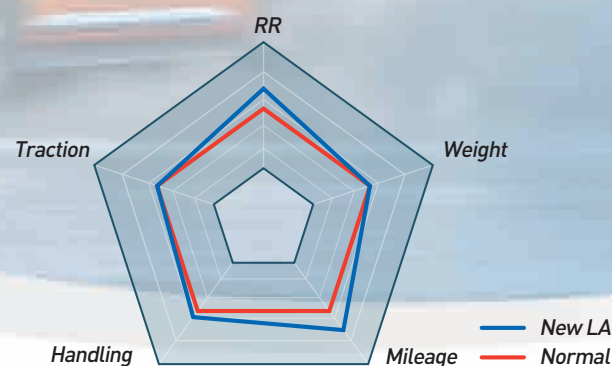

RADIAL TRUCK TIRE



ORIGIN: THAILAND

SELLING POINTS OF TIRE PRODUCTS

- 1 A combination of 3 way grooves and lateral sipes on block provide outstanding traction and drainage performance in all weather conditions.
- 2 Deep tread depth of 20/32nds provides long tread life.
- 3 Sidewall protector ribs preserve casing durability by fighting curbing damage with thick ribs on both sidewalls.



RESISTANCE GOOD HANDLING



Radial truck tire

(For national and regional transportation)

ALL POSITION

Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi)				Overall Diameter in (in)	Section Width in (in)	Tread Depth (32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
225/70R19.5	128 / 126 M	14	G	3750	110	3970	110	32.08	8.94	20
245/70R19.5	135 / 133 M	16	H	4540	120	4805	120	33.14	9.61	20

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER





ATL863



- Typical combined pattern design offers optimal trailer performance.
- Low rolling resistance.
- Wear-resistance compound reduces shifting to prevent uneven wear.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	385/55R22.5	18	158	L	12.25	---	---	9370	123	39.21	15.20	20.8	ETRTO
	385/55R22.5	20	160(158)	J(L)	12.25	---	---	9915	130	39.21	15.20	20.8	ETRTO
	385/65R22.5	24	164	J	11.75	---	---	11000	130	42.20	15.31	20.8	ETRTO
	385/65R22.5	24	164(158)	K(L)	11.75	---	---	11000	130	42.20	15.31	20.8	ETRTO
	385/65R22.5	18	158	L	11.75	---	---	9370	123	42.20	15.31	20.8	ETRTO
	385/65R22.5	20	160(158)	J(L)	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO
	425/65R22.5	18	162	K	12.25	---	---	10470	110	44.25	16.61	22.0	TRA
	425/65R22.5	20	165	K	12.25	---	---	11400	120	44.25	16.61	22.0	ETRTO
	445/65R22.5	20	169	J	13.00	---	---	12800	130	45.28	17.48	22.7	ETRTO



KTA20



Suitable for all position of trucks using for high traction and high scrub applications.


- Wide and strong shoulder ribs increase tread life.
- Lasting grip and stability.
- High wear resistance.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
★	11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.50	10.98	19.0	TRA
★	11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.50	10.98	19.0	TRA
★	11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.46	10.98	19.0	TRA
★	11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.46	10.98	19.0	TRA
★	285/75R24.5	14	144/141	L	8.25	5675	110	6175	110	41.34	11.14	19.0	TRA
★	285/75R24.5	16	147/144	L	8.25	6175	120	6780	120	41.34	11.14	19.0	TRA
★	295/75R22.5	14	144/141	L	9.00	5675	110	6175	110	39.92	11.73	19.0	TRA
★	295/75R22.5	16	146/143	L	9.00	6005	120	6610	120	39.92	11.73	19.0	TRA

★: SmartWay



KTD23



Suitable for drive axle of trucks using for high traction and high scrub applications.

- Horizontal pattern provides tire excellent drive and braking performance.
- Shoulder pattern groove and open pattern design with good tire heat dissipation.
- Pattern block stiffener effectively restrains grinding block root tear and decorative pattern.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	215/75R17.5	16	135/133	L	6.00	4540	123	4805	123	30.20	8.31	19	ETRTO
	225/70R19.5	12	125/123	L	6.75	3415	95	3640	95	31.93	8.90	20	TRA
	225/70R19.5	14	128/126	L	6.75	3750	110	3970	110	31.93	8.90	20	TRA
	245/70R19.5	14	133/131	L	7.50	4300	110	4540	110	33.03	9.76	20	TRA
	245/70R19.5	16	135/133	L	7.50	4540	120	4805	120	33.03	9.76	20	TRA



F816e+



- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
★	11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
★	11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
★	11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
★	11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
★	285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
★	285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA
★	295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
★	295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA

★: SmartWay



F816



- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
	11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
	11R22.5	16	148/145	M	8.25	6390	123	6945	123	41.50	10.98	18.3	ETRTO
	12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	20.2	ETRTO
	12R22.5	16	150/147	M	9.00	6780	120	7390	120	42.72	11.81	20.2	GB
	12R22.5	18	152/149	L	9.00	7160	135	7830	135	42.72	11.81	20.2	GB
	11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
	11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
	285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
	285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA
	295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
	295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA



ATL812



- Long life.
- Retreadability.
- Low eccentric wear.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	9R22.5	14	136/134	M	6.75	4675	120	4940	120	38.35	9.02	18.3	TRA
	10R22.5	14	141/139	M	7.50	5355	115	5675	115	40.12	10.00	18.9	TRA
	11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	20.2	TRA
	11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	20.2	TRA
	11R22.5	16	148/145	M	8.25	6390	123	6945	123	41.34	10.98	20.2	ETRTO
	12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	21.4	ETRTO
	12R22.5	18	152/149	L	9.00	7160	135	7830	135	42.72	11.81	21.4	GB
	295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	21.4	ETRTO
	295/80R22.5	18	152/149	L	9.00	7160	130	7830	130	41.10	11.73	21.4	GB
	295/80R22.5	18	154/149	M	9.00	7160	123	8270	123	41.10	11.73	21.4	ETRTO
	315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	17.6	ETRTO
	315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	17.6	ETRTO
	285/70R19.5	16	140/137	M	8.25	5070	105	5510	105	35.24	11.14	20.2	ETRTO
	285/70R19.5	18	146/144	M	8.25	6175	130	6610	130	35.24	11.14	20.2	ETRTO
	285/70R19.5	18	150/148	J	8.25	6945	130	7390	130	35.24	11.14	20.2	ETRTO
	275/70R22.5	16	148/145	M	8.25	6390	130	6945	130	37.72	10.87	20.2	ETRTO



LLF56+



Suitable for all position axle of buses and trucks.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	9R22.5	12	133/131	M	6.75	4300	105	4540	105	38.35	9.02	17.0	TRA
	9R22.5	14	136/134	M	6.75	4675	120	4940	120	38.35	9.02	17.0	TRA
	10R22.5	14	141/139	M	7.50	5355	115	5675	115	40.12	10.00	17.6	TRA
	10R22.5	14	144/142	L	7.50	5840	123	6175	123	40.12	10.00	17.6	ETRTO
	10R22.5	16	144/142	L	7.50	5840	130	6175	130	40.12	10.00	17.6	GB



KTD301




- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.93	10.98	28.3	TRA
	11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.93	10.98	28.3	TRA
	11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.93	10.98	28.3	ETTRO
	11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.94	10.98	28.3	TRA
	11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.94	10.98	28.3	TRA



LLA18




- Recommended for Regional applications.
- Zig-zag groove tread design reduces stone retention

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	385/65R22.5	18	158	K	11.75	---	---	9370	123	42.20	15.31	20.8	ETRTO
	385/65R22.5	20	160	J	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO



LLA28



- Recommended for Regional applications.
- Zig-zag groove tread design reduces stone retention
- Tread pattern delivers lateral traction in all weather conditions

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	425/65R22.5	18	162	K	12.25	---	---	10470	110	44.25	16.61	22.0	TRA
	425/65R22.5	20	165	J/K	12.25	---	---	11400	120	44.25	16.61	22.0	ETRTO



KTT306



- Low fuel consumption.
- HAT technology: low heat generation.
- Zigzag pattern design.
- New technology for tire to reduce the weight.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO



F820



Suitable for all position axle of buses and medium trucks.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	8.5R17.5	12	121/120	M	6.00	3085	91	3195	91	31.57	8.46	16.4	ETRTO
	205/75R17.5	14	124/122	M	6.00	3305	109	3525	109	29.65	8.03	15.7	ETRTO
	215/75R17.5	16	135/133	J/L	6.00	4540	123	4805	123	30.20	8.31	15.7	ETRTO
	235/75R17.5	16	141/140	L	6.75	5510	123	5675	123	31.38	9.17	16.4	ETRTO
	235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	16.4	ETRTO
	225/70R19.5	12	125/123	M	6.75	3415	95	3640	95	31.93	8.90	15.7	TRA
	225/70R19.5	14	128/126	M	6.75	3750	110	3970	110	31.93	8.90	15.7	TRA
	245/70R19.5	14	133/131	M	7.50	4300	110	4540	110	33.03	9.76	16.4	TRA
	245/70R19.5	14	133/131	M	7.50	4300	109	4540	109	33.03	9.76	16.4	ETRTO
	245/70R19.5	16	135/133	M	7.50	4540	120	4805	120	33.03	9.76	16.4	TRA
	245/70R19.5	16	136/134	M	7.50	4675	120	4940	120	33.03	9.76	16.4	ETRTO
	245/70R19.5	18	141/140	J	7.50	5510	123	5675	123	33.03	9.76	16.4	ETRTO
	265/70R19.5	16	139/136	M	7.50	4940	120	5355	120	34.13	10.31	17.0	GB
	265/70R19.5	16	140/138	M	7.50	5205	112	5510	112	34.13	10.31	17.0	ETRTO
	265/70R19.5	18	143/141	J	7.50	5675	123	6005	123	34.13	10.31	17.0	ETRTO
	285/70R19.5	16	144/142	M	8.25	5840	116	6175	116	35.24	11.14	17.6	ETRTO
	285/70R19.5	18	146/144	M	8.25	6175	130	6610	130	35.24	11.14	17.6	ETRTO
	285/70R19.5	18	150/147	J	8.25	6780	130	7390	130	35.24	11.14	17.6	ETRTO
	255/70R22.5	16	140/137	M	7.50	5070	120	5510	120	36.61	10.04	17.6	TRA
	255/70R22.5	16	140/137	M	7.50	5070	116	5510	116	36.61	10.04	17.6	ETRTO
	275/70R22.5	16	148/145	M	8.25	6390	130	6945	130	37.72	10.87	18.3	ETRTO
	275/70R22.5	18	150/148	M	8.25	6945	130	7390	130	37.72	10.87	18.3	ETRTO



D905



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	215/75R17.5	12	124/123	M	6.00	3415	100	3525	100	30.20	8.31	18.9	ETRTO
	215/75R17.5	14	126/124	L/M	6.00	3525	102	3750	102	30.20	8.31	18.9	ETRTO
	215/75R17.5	16	135/133	J/L	6.00	4540	123	4805	123	30.20	8.31	18.9	ETRTO
	235/75R17.5	14	132/130	L/M	6.75	4190	112	4400	112	31.38	9.17	19.5	ETRTO
	235/75R17.5	16	141/140	J	6.75	5510	123	5675	123	31.38	9.17	19.5	ETRTO
	235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	19.5	ETRTO
	295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	22.0	ETRTO
	295/80R22.5	18	152/149	M	9.00	7160	130	7830	130	41.10	11.73	22.0	GB
	285/70R19.5	18	146/144	M	8.25	6175	130	6610	130	35.24	11.14	20.2	ETRTO
	285/70R19.5	18	150/148	J	8.25	6945	130	7390	130	35.24	11.14	20.2	ETRTO
	275/70R22.5	16	148/145	M	8.25	6390	130	6945	130	37.72	10.87	22.0	ETRTO



D928



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.69	10.98	25.8	TRA
	11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.69	10.98	25.8	TRA
	11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.69	10.98	25.8	ETRTO
	11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.70	10.98	25.8	TRA
	11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.70	10.98	25.8	TRA
	285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.57	11.14	25.8	TRA
	285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.57	11.14	25.8	TRA
	295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.16	11.73	25.8	TRA
	295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.16	11.73	25.8	TRA



LEAO TIRE



LLF02



- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	18.3	ETRTO
	13R22.5	18	156/150	L	9.75	7390	127	8820	127	44.25	12.60	20.8	ETRTO
	295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	18.3	ETRTO
	295/80R22.5	18	152/149	M	9.00	7160	130	7830	130	41.10	11.73	18.3	GB
	295/80R22.5	18	154/149	M	9.00	7160	123	8270	123	41.10	11.73	18.3	ETRTO
	315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	18.3	ETRTO
	315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	18.3	ETRTO
	315/80R22.5	22	158/150(154/150)	L(M)	9.00	7390	130	9370	130	42.36	12.28	18.3	ETRTO



AAL800



- Suitable for all position axle of trucks running on the multi road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	12.00R24	18	156/153	K	8.5	8050	112	8820	112	48.27	12.32	18.9	ETRTO
	12.00R24	20	160/156	K	8.5	8820	123	9915	123	48.27	12.32	18.9	ETRTO
	11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.50	10.98	20.2	TRA
	11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	20.2	ETRTO
	12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	20.2	ETRTO
	12R22.5	18	152/149	K	9.00	7160	135	7830	135	42.72	11.81	20.2	GB
	315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	20.2	ETRTO
	315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	20.2	ETRTO

KTA303



Suitable for all position axle of trucks running under a wide range of use, from highway to light unpaved road.

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with stone rejection design.
- HAT technology: low heat generation.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	9.5R17.5	18	143/141	M/J	6.75	5675	127	6005	127	33.15	9.45	14.5	ETRTO
	215/75R17.5	14	126/124	L	6.00	3525	102	3750	102	30.20	8.31	15.1	ETRTO
	215/75R17.5	16	135/133	J	6.00	4540	123	4805	123	30.20	8.31	15.1	ETRTO
	235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	15.7	ETRTO
	11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO
	12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	18.9	ETRTO
	12R22.5	18	152/149	L	9.00	7160	135	7830	135	42.72	11.81	18.9	GB
	295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	17.6	ETRTO
	295/80R22.5	18	152/149	L	9.00	7160	130	7830	130	41.10	11.73	17.6	GB
	315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	17.6	ETRTO
	265/70R19.5	18	143/141	J	7.50	5675	123	6005	123	34.13	10.31	15.7	ETRTO
	385/65R22.5	20	160	K	11.75	—	—	9915	130	42.20	15.31	20.2	ETRTO

KTT308



- Low fuel consumption.
- HAT technology: low heat generation.
- Stone rejection design.
- New technology for tire to reduce the weight.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER



LEAO TIRE

KTD303



Suitable for drive axle of trucks running under a wide range of use, from highway to light unpaved road.

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S.
- HAT technology: low heat generation.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	9.5R17.5	18	143/141	L	6.75	5675	127	6005	127	33.15	9.45	18.3	ETRTO
	215/75R17.5	16	135/133	J	6.00	4540	123	4805	123	30.20	8.31	17.6	ETRTO
	235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	18.3	ETRTO
	10.00R20	18	149/146	K	7.5	6610	135	7160	135	41.50	10.94	22.0	GB
	295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	21.4	ETRTO
	295/80R22.5	18	152/149	L	9.00	7160	130	7830	130	41.10	11.73	21.4	GB
	295/80R22.5	18	154/149	L	9.00	7160	123	8270	123	41.10	11.73	21.4	ETRTO
	315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	22.7	ETRTO
	265/70R19.5	18	143/141	J	7.50	5675	123	6005	123	34.13	10.31	18.3	ETRTO

KTT307



- Low fuel consumption.
- HAT technology: low heat generation.
- Stone rejection design.
- New technology for tire to reduce the weight.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO
	11R22.5	18	149/146	K	8.25	6610	135	7160	135	41.34	10.98	17.6	GB
	295/80R22.5	18	154/149	L	9.00	7160	123	8270	123	41.10	11.73	17.6	ETRTO

LLF02e+



- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
★	315/80R22.5	18	154/151	M	9.00	7610	120	8270	120	42.36	12.28	18	TRA
★	315/80R22.5	20	157/154	L	9.00	8270	130	9090	130	42.36	12.28	18	TRA

★: SmartWay

A928




- suitable for all position axle of trucks



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	385/65R22.5	24	164	J	11.75	---	---	11000	130	42.20	15.31	21	ETRTO

LLF86



- Suitable for medium trucks running on the high-grade road.



Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	215/75R17.5	14	126/124	L/M	6.00	3525	102	3750	102	30.20	8.31	15.7	ETRTO
	215/75R17.5	16	135/133	J/L	6.00	4540	123	4805	123	30.20	8.31	15.7	ETRTO

LONG HAUL

REGIONAL


ON&OFF ROAD

COACH&URBAN

WINTER



KJT016




Regional Haul Application / Pickup & Delivery Service Drive.

- Aggressive zigzag center grooves and open shoulder grooves provide outstanding traction in mud and snow.
- Stone rejectors protect the casing in base of the tread groove.
- Protect ribs on both sidewalls to fight damage from curbing, cuts and abrasions.
- 3D SIPS locks together under compression for the stability of a solid block.
- Strong carcass materials help promote tire durability and provide tire retreadability.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	225/70R19.5	12	125/123	M	6.75	3415	95	3640	95	31.93	8.90	18.9	TRA
	225/70R19.5	14	128/126	N	6.75	3750	110	3970	110	31.93	8.90	18.9	TRA



D955




- Suitable for medium trucks running on the normal road.
- Good braking and grip on wet road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	225/70R19.5	12	125/123	M	6.75	3415	95	3640	95	31.93	8.90	18.3	TRA
	225/70R19.5	14	128/126	M	6.75	3750	110	3970	110	31.93	8.90	18.3	TRA
	245/70R19.5	14	133/131	M	7.50	4300	110	4540	110	33.03	9.76	19.5	TRA
	245/70R19.5	14	133/131	M	7.50	4300	109	4540	109	33.03	9.76	19.5	ETRTO
	245/70R19.5	16	135/133	M	7.50	4540	120	4805	120	33.03	9.76	19.5	TRA
	245/70R19.5	16	136/134	L	7.50	4675	120	4940	120	33.03	9.76	19.5	ETRTO



AFL866




- Extra wide tread design for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	205/65R17.5	16	129/127 (132/132)	J(G)	6.00	3860	130	4080	130	27.99	8.03	15.7	ETRTO
	215/70R17.5	14	123/121	L	6.00	3415	112	3195	112	29.41	8.31	18.3	JATMA
	245/70R17.5	18	143/141	J	7.50	5675	127	6005	127	31.06	9.76	18.3	ETRTO
	215/75R17.5	14	126/124	M	6.00	3525	102	3750	102	30.20	8.31	18.3	ETRTO
	215/75R17.5	16	135/133	J	6.00	4540	123	4805	123	30.20	8.31	18.3	ETRTO
	235/75R17.5	14	132/130	M	6.75	4190	112	4400	112	31.38	9.17	18.3	ETRTO
	235/75R17.5	16	141/140	J	6.75	5510	123	5675	123	31.38	9.17	18.3	ETRTO
	235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	18.3	ETRTO
	225/80R17.5	14	123/122	L	6.75	3305	102	3415	102	31.69	8.90	20.2	JATMA
	225/90R17.5	14	127/125	L	6.75	3640	102	3860	102	33.50	8.90	16.4	JATMA
	225/90R17.5	16	128/126	L	6.75	3750	102	3970	102	33.50	8.90	16.4	JATMA



LLA78



- Suitable for medium trucks running on the high-grade road.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	235/75R17.5	14	132/130	L/M	6.75	4190	112	4400	112	31.38	9.17	16.4	ETRTO
	235/75R17.5	16	141/140	J	6.75	5510	123	5675	123	31.38	9.17	16.4	ETRTO
	235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	16.4	ETRTO
	245/70R17.5	18	143/141	J	7.50	5675	127	6005	127	31.06	9.76	15.1	ETRTO



LEAO TIRE

ON&OFF ROAD



AAM31
RADIAL TRUCK TIRE
Mixed Service All Position
P47



AAM32w
RADIAL TRUCK TIRE
Service All Position Wide Base Tire
P49



LONG HAUL


REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

AAM31

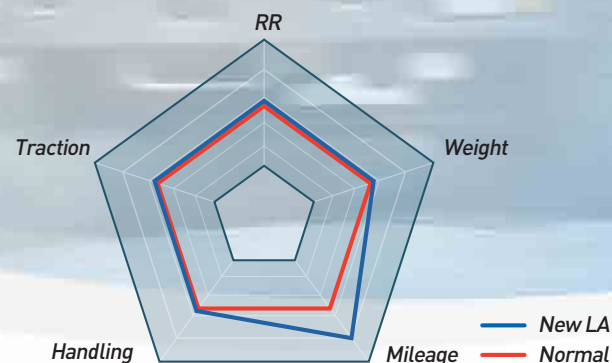


RADIAL TRUCK TIRE

ORIGIN: THAILAND

SELLING POINTS OF TIRE PRODUCTS

- 1 Durable tread compound and robust shoulder designed for excellent wear resistance.
- 2 3-groove pattern combined with zigzag grooves offering outstanding traction and water drainage.
- 3 Center lug with diagonal sipes to promote traction in wet or dry conditions for the life of the tread.

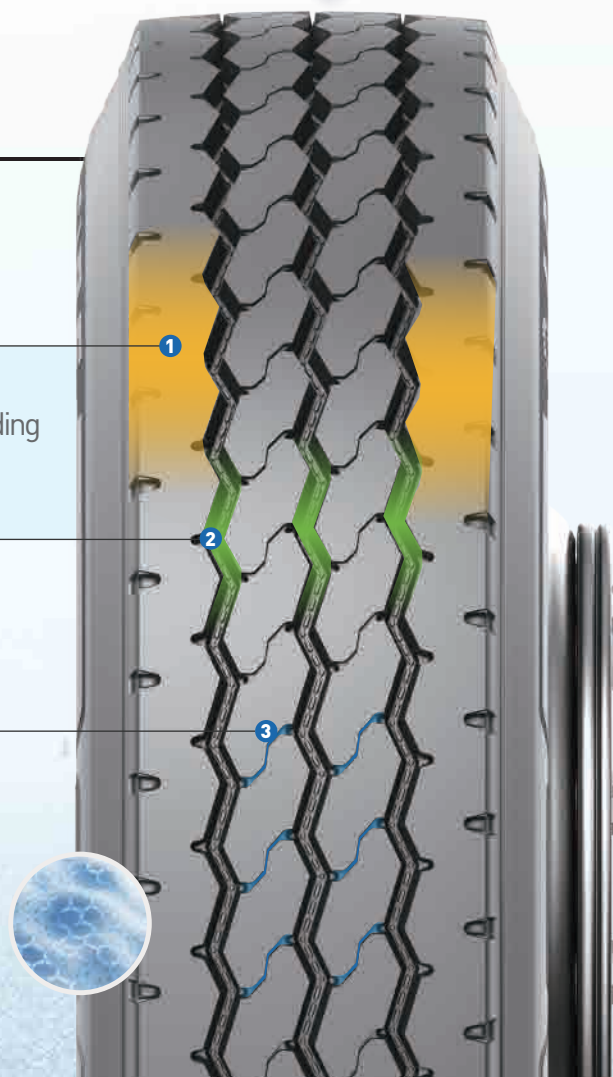

WEAR-RESISTANT



ANTI CUTTING



All Position

Size	Load index & Speed symbols	PR	Load Range	Max Load and Inflated Pressure				Overall Diameter in (in)	Section Width in (in)	Tread Depth (32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
255/70R22.5	140/137 M	16	H	5070	120	5510	120	36.54	10.16	17
11R22.5	146/143K	16	H	6005	120	6610	120	41.09	11.06	19
11R24.5	149/146K	16	H	6610	120	7160	120	43.06	11.06	19
315/80R22.5	157/154 K	20	L	8270	130	9090	130	42.33	12.60	19

LONG HAUL

REGIONAL


ON&OFF ROAD

COACH&URBAN

WINTER



AAM32w

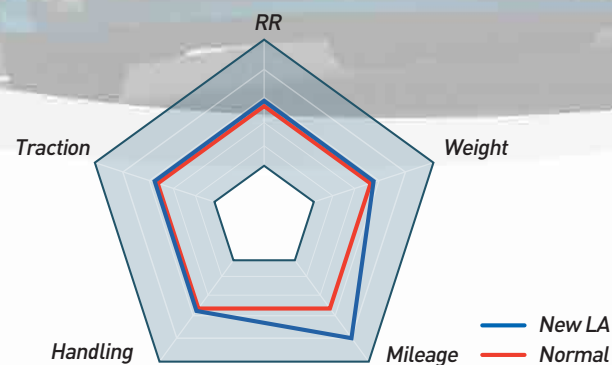


RADIAL TRUCK TIRE



ORIGIN: THAILAND

SELLING POINTS OF TIRE PRODUCTS

- 1 Open shoulder offers good traction while durable tread compound and robust shoulder block designed for excellent wear resistance.
- 2 Self-cleaning tread pattern provides high traction with stone rejector platforms in every groove for excellent durability.
- 3 Tread compounded and constructed to resist cuts and impacts in mixed service.

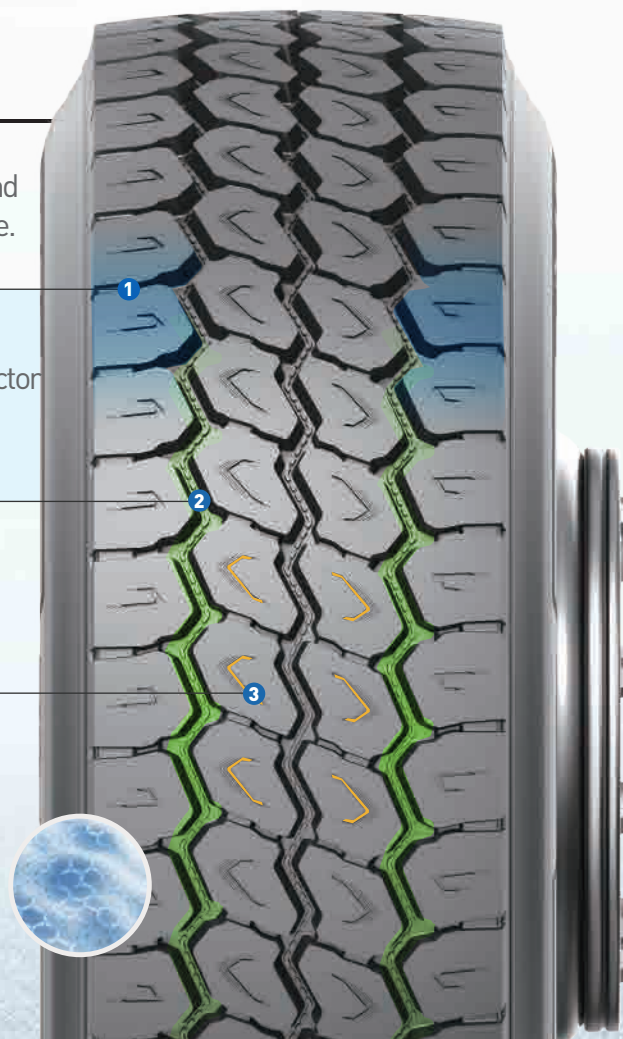

WEAR-RESISTANT



TRACTIVE FORCE



All Position

Size	Load index & Speed symbols	PR	Load Range	Max Load and Inflated Pressure				Overall Diameter in (in)	Section Width in (in)	Tread Depth (32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
385/65R22.5	160 K	20	L	---	---	9920	130	42.22	14.96	21

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER





LLA08



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	12.00R24	18	156/153	K	8.5	8050	112	8820	112	48.27	12.32	21.4	ETRTO
	12.00R24	20	160/156	K	8.5	8820	123	9915	123	48.27	12.32	21.4	ETRTO
	11R22.5	14	144/142	K	8.25	5840	105	6175	105	41.50	10.98	18.9	TRA
	11R22.5	16	146/143	K	8.25	6005	120	6610	120	41.50	10.98	18.9	TRA
	11R22.5	16	148/145	K	8.25	6390	123	6945	123	41.50	10.98	18.9	ETRTO
	11R22.5	18	149/146	L/K	8.25	6610	135	7160	135	41.50	10.98	18.9	GB
	12R22.5	16	152/148	K	9.00	6945	123	7830	123	42.68	11.81	21.4	ETRTO
	12R22.5	18	152/149	K	9.00	7160	135	7830	135	42.72	11.81	21.4	GB
	11R24.5	14	146/143	K	8.25	6005	105	6610	105	43.46	10.98	20.8	TRA
	11R24.5	16	149/146	K	8.25	6610	120	7160	120	43.46	10.98	20.8	TRA
	12R24.5	16	152/149	K	9.00	7160	120	7830	120	44.69	11.81	20.2	TRA
	12R24.5	18	154/151	K	9.00	7610	135	8270	135	44.69	11.81	20.2	GB
	255/70R22.5	16	140/137	M	7.50	5070	120	5510	120	36.61	10.04	16.0	TRA
	295/80R22.5	16	152/148	K	9.00	6945	123	7830	123	41.10	11.73	20.2	ETRTO
	295/80R22.5	18	154/149	K	9.00	7160	123	8270	123	41.10	11.73	20.2	ETRTO
	315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	22.0	ETRTO
	315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	22.0	ETRTO
	315/80R22.5	22	158/150	L	9.00	7390	130	9370	130	42.36	12.28	22.0	ETRTO



AD0912



- Good traction resistance.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	16	148/145	J	8.25	6390	123	6945	123	41.34	10.98	25.2	ETRTO
	275/80R22.5	16	149/146	J	8.25	6610	123	7160	123	39.84	10.87	25.2	ETRTO
	295/80R22.5	16	152/148	F	9.00	6945	123	7830	123	41.10	11.73	25.2	ETRTO



AD0986



- Suitable for hilly area and mine etc., off road conditions.
- Off-road pattern block ensures powerful traction and good self-cleaning ability.
 - Chip, cut and abrasion resistance tread compound.
 - Deep tread depth increases mileage and service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	12.00R24	20	160/156	F	8.5	8820	123	9915	123	48.27	12.32	32.1	ETRTO
	12.00R24	18	156/153	F	8.5	8050	112	8820	112	48.27	12.32	32.1	ETRTO
	12.00R24	20	160/157	F	8.5	9095	130	9915	130	48.27	12.40	32.1	GB
	12.00R24	18	158/155	F	8.5	8540	120	9370	120	48.27	12.40	32.1	GB
	11R22.5	14	144/142	F	8.25	5840	105	6175	105	41.93	10.98	30.9	TRA
	11R22.5	16	146/143	F	8.25	6005	120	6610	120	41.93	10.98	30.9	TRA
	11R22.5	16	148/145	F	8.25	6390	123	6945	123	41.93	10.98	30.9	ETRTO
	12R22.5	16	152/148	F	9.00	6945	123	7830	123	42.68	11.81	30.9	ETRTO
	12R22.5	18	152/149	F	9.00	7160	135	7830	135	43.15	11.81	30.9	GB
	13R22.5	18	156/150	F	9.75	7390	127	8820	127	44.25	12.60	30.9	ETRTO
	11R24.5	14	146/143	F	8.25	6005	105	6610	105	43.94	10.98	30.9	TRA
	11R24.5	16	149/146	F	8.25	6610	120	7160	120	43.94	10.98	30.9	TRA
	295/80R22.5	16	152/148	F	9.00	6945	123	7830	123	41.10	11.73	30.9	ETRTO
	295/80R22.5	18	152/149	F	9.00	7160	130	7830	130	41.34	11.73	30.9	GB
	315/80R22.5	18	154/150	F	9.00	7390	120	8270	120	42.36	12.28	30.9	ETRTO
	315/80R22.5	20	156/150	F	9.00	7390	123	8820	123	42.36	12.28	30.9	ETRTO



LLA08A



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	275/80R22.5	16	147/144	K	8.25	6175	120	6780	120	39.84	10.87	20	GB
	275/80R22.5	16	149/146	K	8.25	6610	123	7160	123	39.84	10.87	20	ETTRO
	275/80R22.5	18	149/146	K	8.25	6610	130	7160	130	39.84	10.87	20	GB



KMA400



Suitable for all position axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	295/80R22.5	18	152/149	K	9.00	7160	130	7830	130	41.10	11.73	23.9	GB
	13R22.5	18	156/150	K	9.75	7390	127	8820	127	44.25	12.60	23.9	ETRTO
	13R22.5	20	158/156	K	9.75	8820	130	9370	130	44.25	12.60	23.9	ETRTO
	295/80R22.5	16	152/148	K	9.00	6945	123	7830	123	41.10	11.73	23.9	ETRTO
	315/80R22.5	18	154/150	K	9.00	7390	120	8270	120	42.36	12.28	23.9	ETRTO
	315/80R22.5	20	156/150	K	9.00	7385	123	8820	123	42.36	12.28	23.9	ETRTO
	425/65R22.5	20	165	K	12.25	---	---	11400	120	44.25	16.93	23.3	ETRTO
	445/65R22.5	20	169	J/K	13.00	---	---	12800	130	45.28	17.87	23.3	ETRTO



KXA400



Suitable for trailer and steer axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S marking.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	385/65R22.5	18	158	L	11.75	---	---	9370	123	42.20	15.31	22.7	ETRTO
	385/65R22.5	20	160(158)	K(L)	11.75	---	---	9915	130	42.20	15.31	22.7	ETRTO
	385/65R22.5	24	164	J	11.75	---	---	11000	130	42.20	15.31	22.7	ETRTO
	425/65R22.5	20	165	K	12.25	---	---	11400	120	44.25	16.61	23.3	ETRTO



KMD401



Suitable for drive axle of trucks under all kinds of working conditions.

- Chip, cut and abrasion resistance tread compound.
- Stone rejection design protects groove bottom from stone puncture.
- Deep tread depth increases mileage and service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.50	10.98	25.8	TRA
	11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	25.8	ETTRO
	11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.46	10.98	28.3	TRA
	295/80R22.5	16	152/148	L	9.00	6945	123	7830	123	41.10	11.73	25.8	ETTRO
	295/80R22.5	18	152/149	L	9.00	7160	130	7830	130	41.10	11.73	25.8	GB



AD0986+



Suitable for hilly area and mine etc., off road conditions.

- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth and wide tread width increase mileage and service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	12.00R20	22	158/155	B	8.5	8540	140	9370	140	44.72	12.40	40.3	CAS
	12.00R24	18	158/155	F	8.5	8540	120	9370	120	48.74	12.40	40.3	GB/TRA
	12.00R24	20	160/157	F	8.5	9095	130	9915	130	48.74	12.40	40.3	GB
	12.00R24	22	162/158	B	8.5	9370	130	10470	130	48.74	12.40	40.3	---

KMA40



Suitable for all position axle of trucks under all kinds of working conditions.

- Chip, cut and abrasion resistance tread compound.
- Stone rejection design protects groove bottom from stone puncture.
- Deep tread depth increases mileage and service life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.50	10.98	23.1	TRA
	11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.46	10.98	23.1	TRA

D950



- Drive axle for on/off road conditions.
- Deep and rigid block design for good traction.
- Cut resistance compound.
- Used for logging conditions where high traction required.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	14	144/142	K	8.25	5840	105	6175	105	41.93	10.98	29.0	TRA
	11R22.5	16	146/143	K	8.25	6005	120	6610	120	41.93	10.98	29.0	TRA
	11R24.5	14	146/143	F/G	8.25	6005	105	6610	105	43.94	10.98	31.4	TRA
	11R24.5	16	149/146	F/G	8.25	6610	120	7160	120	43.94	10.98	31.4	TRA
	285/75R24.5	16	147/144	J	8.25	6175	120	6780	120	41.81	11.14	29.0	TRA
	295/75R22.5	16	146/143	J	9.00	6005	120	6610	120	40.39	11.73	29.0	TRA

M-A40A



Suitable for all position axle of trucks under all kinds of working conditions.

- Anti wear and tear compound system ensures the anti-wear performance.
- Longitudinal zig-zag pattern together with the transverse sipe enhance traction performance on mixed roads.
- Pattern with high saturation ratio guarantee the wear performance.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	275/80R22.5	16	147/144	K	8.25	6175	120	6780	120	39.84	10.87	18	GB
	275/80R22.5	18	149/146	K	8.25	6610	130	7160	130	39.84	10.87	18	GB
	275/80R22.5	18	149/146	K	8.25	6610	123	7160	123	39.84	10.87	18	ETTRO

KMA403



Suitable for all position axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: low heat generation.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	12.00R24	18	156/153	K	8.5	8050	112	8820	112	48.27	12.32	19.5	ETRTO
	12.00R24	20	160/156	K	8.5	8820	123	9915	123	48.27	12.32	19.5	ETRTO
	11R22.5	16	148/145	K	8.25	6390	123	6945	123	41.50	10.98	17.6	ETRTO
	295/80R22.5	18	154/149	K	9.00	7160	123	8270	123	41.10	11.73	18.9	ETRTO
	315/80R22.5	20	156/150	K	9.00	7390	123	8820	123	42.36	12.28	19.5	ETRTO
	385/65R22.5	20	160	K	11.75	---	---	9915	130	42.20	15.31	20.2	ETRTO
	385/65R22.5	24	164	G	11.75	---	---	11000	130	42.20	15.31	20.2	ETRTO

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER



AAR919



- Pattern block design reduces shoulder heat.
- Wide running surface and higher saturation design improve the wear mileage.
- Powerful traction, grip and climbing performance.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	16	146/143	J	8.25	6005	120	6610	120	41.50	10.98	23.9	TRA
	11R22.5	16	148/145	K	8.25	6390	123	6945	123	41.34	10.98	23.9	ETRTO
	325/95R24	22	162/160	K	9.0	9915	123	10470	123	48.35	12.80	22.7	ETRTO



KMD403



Suitable for drive axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: low heat generation.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	12.00R24	20	160/156	K	8.5	8820	123	9915	123	48.27	12.32	23.9	ETRTO
	295/80R22.5	18	154/149	K	9.00	7160	123	8270	123	41.10	11.73	23.3	ETRTO
	315/80R22.5	18	154/150	L	9.00	7390	120	8270	120	42.36	12.28	23.9	ETRTO
	315/80R22.5	20	156/150	K	9.00	7390	123	8820	123	42.36	12.28	23.9	ETRTO



LLA38



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	385/55R22.5	18	158	L	12.25	---	---	9370	123	39.21	15.20	20.8	ETRTO
	385/55R22.5	20	160	J	12.25	---	---	9915	130	39.21	15.20	20.8	ETRTO
	385/65R22.5	18	158	K	11.75	---	---	9370	123	42.20	15.31	20.8	ETRTO
	385/65R22.5	20	160	J/K	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO
	385/65R22.5	24	164	J	11.75	---	---	11000	130	42.20	15.31	20.8	ETRTO
	425/65R22.5	18	162	K	12.25	---	---	10470	110	44.25	16.61	22.0	TRA
	425/65R22.5	20	165	J/K	12.25	---	---	11400	120	44.25	16.61	22.0	ETRTO
	445/65R22.5	20	168	J/K	13.00	---	---	12300	120	45.28	17.48	22.7	TRA
	445/65R22.5	20	169	J	13.00	---	---	12800	130	45.28	17.48	22.7	ETRTO

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER



LEAO TIRE

COACH & URBAN



LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER



AAU609



- Enhanced sidewall ensures high safety.
- Tire strength is increased by 35%, with application of ST steel cord.
- Tire bead cracking is prevented, with application fiber layer in bead area.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	16	148/145	J	8.25	6390	123	6945	123	41.34	10.98	26.5	ETRTO
	245/70R19.5	12	129/127	J	7.50	4080	95	3860	95	33.03	9.76	20.2	TRA
	245/70R19.5	14	133/131	J	7.50	4540	110	4300	110	33.03	9.76	20.2	TRA
	245/70R19.5	14	133/131	J	7.50	4540	109	4300	109	33.03	9.76	20.2	ETRTO
	245/70R19.5	16	135/133	J	7.50	4805	120	4540	120	33.03	9.76	20.2	TRA
	245/70R19.5	16	136/134	J	7.50	4940	120	4675	120	33.03	9.76	20.2	ETRTO
	275/70R22.5	16	148/145	J	8.25	6390	130	6945	130	37.72	10.87	26.5	ETRTO
	275/70R22.5	16	148/145 (152/148)	J(E)	8.25	6390	130	6945	130	37.72	10.87	26.5	ETRTO
	275/70R22.5	18	150/148(152/148)	J(F)	8.25	6945	130	7390	130	37.72	10.87	26.5	ETRTO
	305/70R22.5	20	152/150 (154/150)	J(F)	9.00	7390	130	7830	130	39.37	12.01	26.5	ETRTO



LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER



LEAO TIRE

WINTER



LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER



ADW807



- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	16	146/143	M	8.25	6005	116	6610	116	41.50	10.98	25.2	JATMA
	11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	25.2	TRA
	11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.50	10.98	25.2	ETRTO
	315/70R22.5	16	154/150	L	9.00	7390	130	8270	130	39.92	12.28	25.2	ETRTO
	295/80R22.5	16	152/148	K	9.00	6945	123	7830	123	41.10	11.73	25.2	ETRTO
	295/80R22.5	16	150/147	K	9.00	6780	120	7390	120	41.10	11.73	25.2	GB
	315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	25.2	ETRTO
	315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	25.2	ETRTO



KWD600




Suitable for drive axle of trucks under snow condition.

- Lasting grip and stability with M+S and 3PMSF marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	25.8	ETRTO
	315/70R22.5	16	154/150(152/148)	L(M)	9.00	7390	130	8270	130	39.92	12.28	25.2	ETRTO
	315/70R22.5	18	156/150(154/150)	L(M)	9.00	7390	130	8820	130	39.92	12.28	25.2	ETRTO
	315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	27.7	ETRTO
	315/80R22.5	20	156/150(154/150)	L/M	9.00	7390	123	8820	123	42.36	12.28	27.7	ETRTO



ADW808



- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	245/70R17.5	14	134/132	M	7.50	4400	112	4675	112	31.06	9.76	18.9	ETRTO
	245/70R17.5	16	136/134	M	7.50	4675	123	4940	123	31.06	9.76	18.9	ETRTO
	245/70R17.5	18	143/141	L	7.50	5675	127	6005	127	31.06	9.76	18.9	ETRTO
	225/70R19.5	12	125/123	M	6.75	3415	95	3640	95	31.93	8.90	17.0	GB
	225/70R19.5	14	128/126	M	6.75	3750	110	3970	110	31.93	8.90	17.0	GB
	215/75R17.5	14	126/124	M	6.00	3525	102	3750	102	30.20	8.31	16.4	ETRTO
	215/75R17.5	16	135/133	J	6.00	4540	123	4805	123	30.20	8.31	16.4	ETRTO
	215/75R17.5	14	125/122	L	6.00	3305	110	3640	110	30.20	8.31	16.4	GB
	215/75R17.5	16	127/124	J	6.00	3525	120	3860	120	30.20	8.31	16.4	GB
	235/75R17.5	14	132/130	M	6.75	4190	112	4400	112	31.38	9.17	17.6	ETRTO
	235/75R17.5	16	141/140	J	6.75	5510	123	5675	123	31.38	9.17	17.6	ETRTO
	235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	17.6	ETRTO
	235/75R17.5	14	129/126	L	6.75	3750	110	4080	110	31.38	9.17	17.6	GB
	235/75R17.5	16	132/129	J	6.75	4080	120	4400	120	31.38	9.17	17.6	GB



AFW806



- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Low noise.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	16	146/143	M	8.25	6005	116	6610	116	41.50	10.98	18.9	JATMA
	11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.9	TRA
	11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.50	10.98	18.9	ETRTO
	11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.9	TRA
	11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.9	TRA
	385/65R22.5	20	160(158)	J(L)	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO
	275/70R22.5	16	148/145	M	8.25	6390	130	6945	130	37.72	10.87	18.9	ETRTO
	275/70R22.5	16	144/141	M	8.25	5675	120	6175	120	37.72	10.87	18.9	GB
	315/70R22.5	16	154/150	L	9.00	7390	130	8270	130	39.92	12.28	18.9	ETRTO
	295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.39	11.73	18.9	TRA
	295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.39	11.73	18.9	TRA
	295/80R22.5	16	152/148	K	9.00	6945	123	7830	123	41.10	11.73	18.9	ETRTO
	295/80R22.5	16	150/147	K	9.00	6780	120	7390	120	41.10	11.73	18.9	GB
	315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	18.9	ETRTO
	315/80R22.5	20	156/150(154/150)	L/M	9.00	7390	123	8820	123	42.36	12.28	18.9	ETRTO



KWT600




- For trailer axle of trucks under snow condition use only.
- Lasting grip and stability with M+S and 3PMSF marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	385/55R22.5	18	158	L	12.25	---	---	9365	123	39.21	15.20	18.3	ETRTO
	385/55R22.5	20	160(158)	K(L)	12.25	---	---	9915	130	39.21	15.20	18.3	ETRTO
	385/65R22.5	20	160(158)	K(L)	11.75	---	---	9920	130	42.20	15.31	19.5	ETRTO
	385/65R22.5	24	164(158)	K(L)	11.75	---	---	11000	130	42.20	15.31	19.5	ETRTO



KWD601



- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	245/70R19.5	12	129/127	M	7.50	4080	95	3860	95	33.03	9.76	18.3	TRA
	245/70R19.5	14	133/131	M	7.50	4540	110	4300	110	33.03	9.76	18.3	TRA
	245/70R19.5	14	133/131	M	7.50	4540	109	4300	109	33.03	9.76	18.3	ETRTO
	245/70R19.5	16	135/133	M	7.50	4805	120	4540	120	33.03	9.76	18.3	TRA
	245/70R19.5	16	136/134	M	7.50	4940	120	4675	120	33.03	9.76	18.3	ETRTO

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER



KWD700

- 3D Kerf technology provides excellent traction and long original tread life.
- Wide tread design and combined structure of rib and block pattern provides stability, longer mileage, and better handling performance in all weather conditions.
- Long life, low rolling resistance.
- Optimizes the footprint for even wear and long tread life.
- Strong carcass materials help promote tire durability and provide tire retreadability.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.93	10.98	27.1	TRA
	11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.94	10.98	27.1	TRA



AS-A10

- High safety and good handling with M+S and All Season marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	245/70R19.5	16	136/134	J	7.50	4675	123	4940	123	33.03	9.76	23	JATMA



TRUCK AND BUS TIRES REPLACEMENT LIMITED WARRANTY

Warranty Eligibility

This limited warranty applies to all the qualified replacement market Truck and Bus Tires produced by Shandong Linglong Tyre Co., Ltd. and all its subsidiaries. This Limited Warranty only applies to the original purchaser, and the tire has a complete brand identification, DOT or barcode . and it is valid if all of the following apply:

- The tires are manufactured after January 1, 2025, and are shipped to North America for sale and use.
- The tire fails due to the workmanship or materials.
- The tire shall not exceed the warranty period, and the remaining pattern shall not be less than TWI.

What is warranted and for how long

- The warranty period is 6 years from the date of tire production, and the remaining pattern depth is not less than TWI .
- If the tire fails due to manufacturing reasons and meets the warranty scope and conditions, the remaining pattern exceeds TWI, the new tire of the same specification will be covered free of charge.

What is not warranted

- 1.Road hazard injuries or damages caused by obstacles or debris, such as cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions or impact breaks.
- 2.Improper repairs or repairs that have failed.
- 3.Improper inflation or other maintenance abuses.
- 4.Improper mounting/dismounting.
- 5.Mechanical irregularities such as bent wheel assemblies, misalign-ment worn or faulty components.
- 6.Accident, corrosion, tire alteration, vandalism, fire, theft or damages cause by nature.
- 7.Damage from overinflation or under-inflation, overloading, defective vehicle mechanical conditions.
- 8.Non-racing or off-road tires that are misused or abused for racing or off-road purposes.
- 9.Ozone or weather cracking or other abuse, misuse, tire alteration, run flat.
- 10.Tire which D.O.T identification number and/or brand name removed intentionally.
- 11.Tires that have been modified after leaving the factory , such as fillers, sealants, balancing substances and external tire treatments or materials of any kind. If the added material is the cause of a failure, a tire will not be accepted for warranty claim.
- 12.Abnormal tread wear resulting from improper installation, wheel misalignment, tire/wheel assembly imbalance, etc.
- 13.Vehicles or tires operated in excess of the rated Work Capacity Factor.
- 14.Additional monetary loss, such as damage of the vehicle or time, etc.

CASING WARRANTY

We offer retreading guarantees for Truck and Bus Tires. if the tires cannot be retreaded due to the manufacturer's own reasons, a subsidy will be provided. This renovation rule applies only to the United States and Canada.

ATLAS brand offer a 6-year warranty with 2 retreads; Some specified patterns offer a 8-year warranty with 4 retreads; The specific details of the specified patterns are as follows.

Brand	Warranty	Specified tire patterns
LEAO	Warranty period for retreading is 6 years,and can be retreaded 2 times. For the specified tire patterns, retreadingwarranty period is 7 years, and can be retreaded 3 times.	ADL11
		ATL11
		AAR21
		ADR21
		ATR21
		AAR22s

To make a claim under this limited warranty

- 1.Present your tires and the original purchase receipt to point of purchase or any the Company’ s dealer.
- 2.Complete and sign the Claim Adjustment form provided, keep a copy for your records and leave the tire with the dealer to process the warranty claim.

Owner’s obligation

- 1.At the time of purchase, tires must be properly installed with recommended inflation and balanced. Observe rotation and alignment regularly according to recommendations.
- 2.Refer to any authorized the Company’ s dealer or point of purchase for adjustment claim.
- 3.Owner is responsible for service charges and applicable taxes.
- 4.Submit a copy of the original purchase receipt to support the adjustment claim.

Exclusions, Limitations, and Legal Rights

No representative or dealer is authorized to make any representation, promise, or agreement on behalf of Linglong, except as expressly stated in this document. Any tire, regardless of construction quality, may fail in service or otherwise become unserviceable due to conditions beyond the manufacturer's control. This warranty does not constitute a representation that tire failure will not occur under any circumstances.

DISCLAIMER: This warranty is provided in lieu of all other warranties and representations, express or implied. Linglong expressly disclaims any and all implied warranties, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. No other warranty or representation of any kind shall be deemed to exist or arise by operation of law.

LIMITATION OF DAMAGES: Under no circumstances shall Linglong be liable for any indirect, special, incidental, consequential, or punitive damages, including but not limited to loss of profits, business interruption, loss of reputation or goodwill, or costs related to replacement transportation or other associated expenses. Certain states or provinces do not allow the exclusion or limitation of incidental or consequential damages; therefore, some portions of this limitation may not be enforceable in specific jurisdictions.

This warranty sets forth specific legal obligations, and additional rights may apply depending on the governing state or provincial law.



LEAO TIRE



Aidan Crowley / Vice President
1-702-525-3191 / Aidan@pinnpart.com

Alden Crowley / CEO
1-702-808-8929 / Alden@pinnpart.com
www.Pinnpart.com