




PINNACLE PARTNERS



**2026
TBR TIRE INVENTORY**



LEAO TIRE

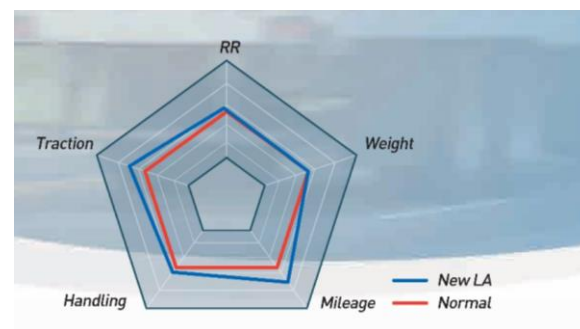

Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi)				Overall Diameter in (in)	Section Width in (in)	Tread Depth (32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
11R22.5	146/143L	16	H	6005	120	6610	120	41.78	11.06	30
11R24.5	149/146L	16	H	6610	120	7160	120	43.75	11.06	30

ADR21[®]



LEAO TIRE

SELLING POINTS OF TIRE PRODUCTS

- 1 Open shoulder offers good traction and help with heat dissipation while durable tread compound and narrow groove between shoulder and next rid designed for excellent wear resistance on shoulder.
- 2 Aggressive pattern and lateral grooves provides tire excellent drive and braking performance.
- 3 Two main grooves helps to provide good handling performance.





LEAO TIRE



LONG HAUL **LLD37e+**



Suitable for the drive axle of the trucks running on highway.

- Good braking and grip on wet road.
- Long life.
- Low fuel consumption.
- Certified by U.S.A SmartWay.


Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
★	11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA



LEAO TIRE



A938

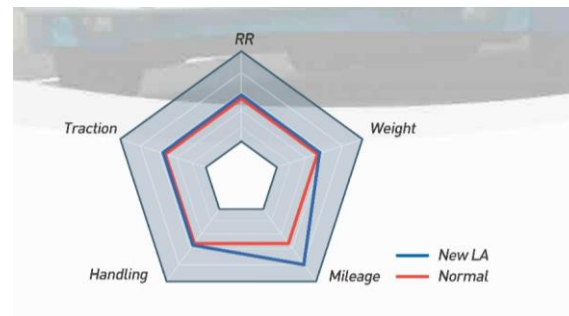

ON & OFF ROAD



All Position

Size	Load index & Speed symbols	PR	Load Range	Max Load and Inflated Pressure				Overall Diameter in (in)	Section Width in (in)	Tread Depth (32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
385/65R22.5	164 J	24	N	11,020				42.20	15.31	21



LEAO TIRE



ON & OFF ROAD / All Position

KMA400+



Suitable for all position axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.

Authentication

Size

Ply
Rating

Load
Index

Speed
Symbols

Standard
Rim

Max Load and Inflated Pressure

Dual

Single

Overall
Diameter
(in)

Section
Width
(in)

Tread
Depth
(32nds)

Operation
Norm



425/65R22.5

20

165

K

12.25

11400

120

44.25

16.93

23.3

ETRTO



LEAO TIRE



KXA400



Suitable for trailer and steer axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S marking.

Authentication	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual		Single					
						lbs	psi	lbs	psi				
	425/65R22.5	20	165	K	12.25	---	---	11400	120	44.25	16.61	23.3	ETRTO

Harmony between Man and Nature



LINGLONG TIRE

- Company Established in 1975
- Public Company listed on the Shanghai Stock Exchange SSE: 601966
- 19,000+ Employees
- Total Revenue \$3.05 Billion USD 2024
- Manufacture Plants: 3 in China, 1 in Thailand, 1 in Serbia
- Manufacture Capacity: 95 Million Tires / 2024
PCR Tires / LTR Tires / TBR Tires / Tractor Tires

Brands



LEAO TIRE



EVOLUX



GREEN MAX

- Among the global top 10 tire companies



LEAO TIRE



Aidan Crowley / Vice President
1-702-525-3191 / Aidan@pinnpart.com

Alden Crowley / CEO
1-702-808-8929 / Alden@pinnpart.com
www.Pinnpart.com